


TORRIX CI – Technical Data



Probe head	
Protection class	IP68
Material	Stainless steel 303
Cable terminal	M12 Connector
Ambient temperature	- 40 °C to + 85 °C
Probe tube	
Material	Stainless steel 304/316 Ti
Accuracy	
Filling level	±1 mm oder ±0.025 %
Electrical connection	
Connection	2-wire
Voltage	8 to 50 V _{DC}
Signal	Power output: 4 to 20 mA Failure mode in accordance with NAMUR NE43
Process conditions	
Temperature	- 40 °C to + 85 °C
Pressure	-1 bar to + 3 bar
Length	
	425 mm; 2,000 mm; 2,400 mm; 2,900 mm; 3,300 mm
Process Connctions	
	G ½" R 1½"
Float	
Shape	Cylindrical Ø 43 mm
Matrial	Stainless steel
Density	> 0.7 g/cm ³
Configuration	
	via programming Adapter (Sold separatly)
Configuration Tool	
	FAFNIR USB-Adapter for: Microsoft Windows XP SP2 and higher, Windows Vista SP 1 and higher (32 bit), Windows 7 (32/64 bit).

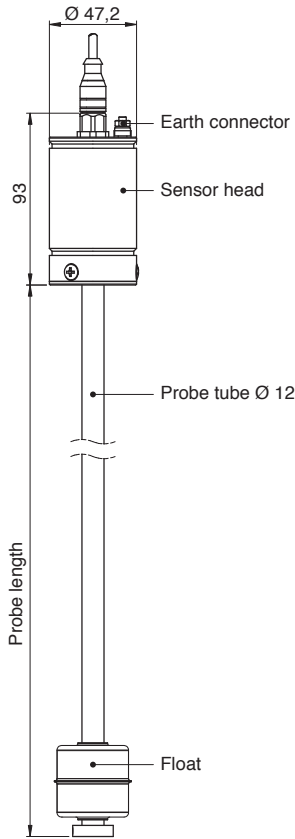